
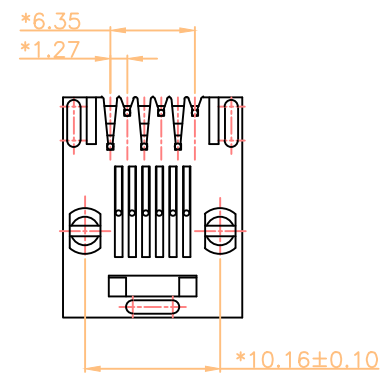
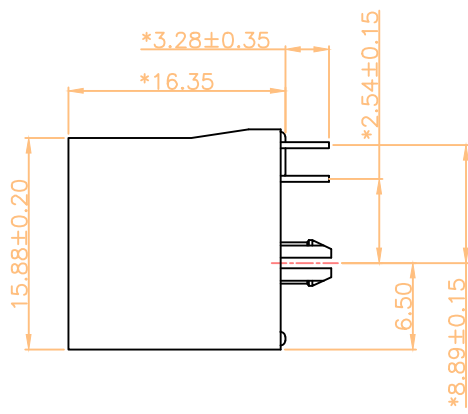


REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

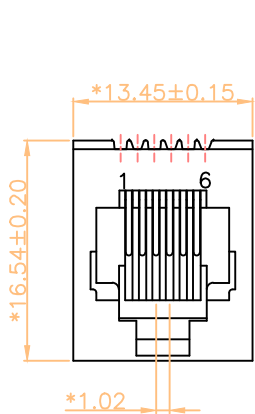

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS MIN.
2. CURRENT RATING: 1.5 AMP MIN.
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL: PBT UL94V-0.
2. CONTACT MATERIAL: PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING: GOLD PLATING OVER NICKEL.
4. OPERATING LIFE: 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER: 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE: -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION: -40°C TO $+85^{\circ}\text{C}$.
3. WAVE SOLDERING TEMPERATURE: $230\sim 250^{\circ}\text{C}$ (3~5 SECONDS).
4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.



CUL FILE NO. E345295

PART NUMBER: EL226X-21XXS1X

NO. OF CONTACT
2-2C 4-4C
6-6C

Gold Plating:
1- 3u" 2- 6u"
3-15u" 4-30u"
5-50u" F-GOLD FLASH

Color Of Housing:
11-W/O LOGO,PBT BLACK
12-W/O LOGO,PBT COOL GRAY 3U
28-W/O LOGO,PBT GREEN

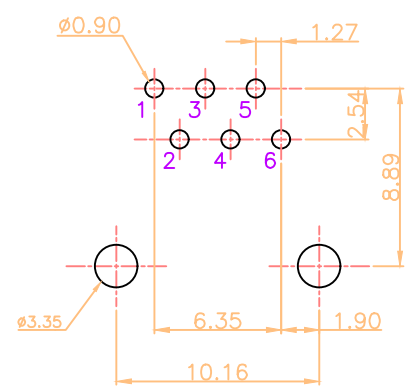

PC Board Layout
Component Side Shown
Dimension Tolerance: ± 0.05

單位: mm		DFTO:	DATE: 2017.07.17
長度公差	角度公差	CHKD: Jerry	DATE: 2017.07.17
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2017.07.17
.00±0.15		脫模角:	顏色:
.000±0.10			MATERIAL:
		TREAT:	處理
		QTY:	數量
		SCALE:	比例 1:1
THIRD ANGLE PROJECTION			

ELLAX CORPORATION.

TITLE: 180° TOP ENTRY PCB JACK 6P			
DWG NO.	EL2266-2111S1F	SIZE	REV
DRAWING NO.	EL226X-21XXS1X_A	A4	A
PART NO.			
零件編號			