


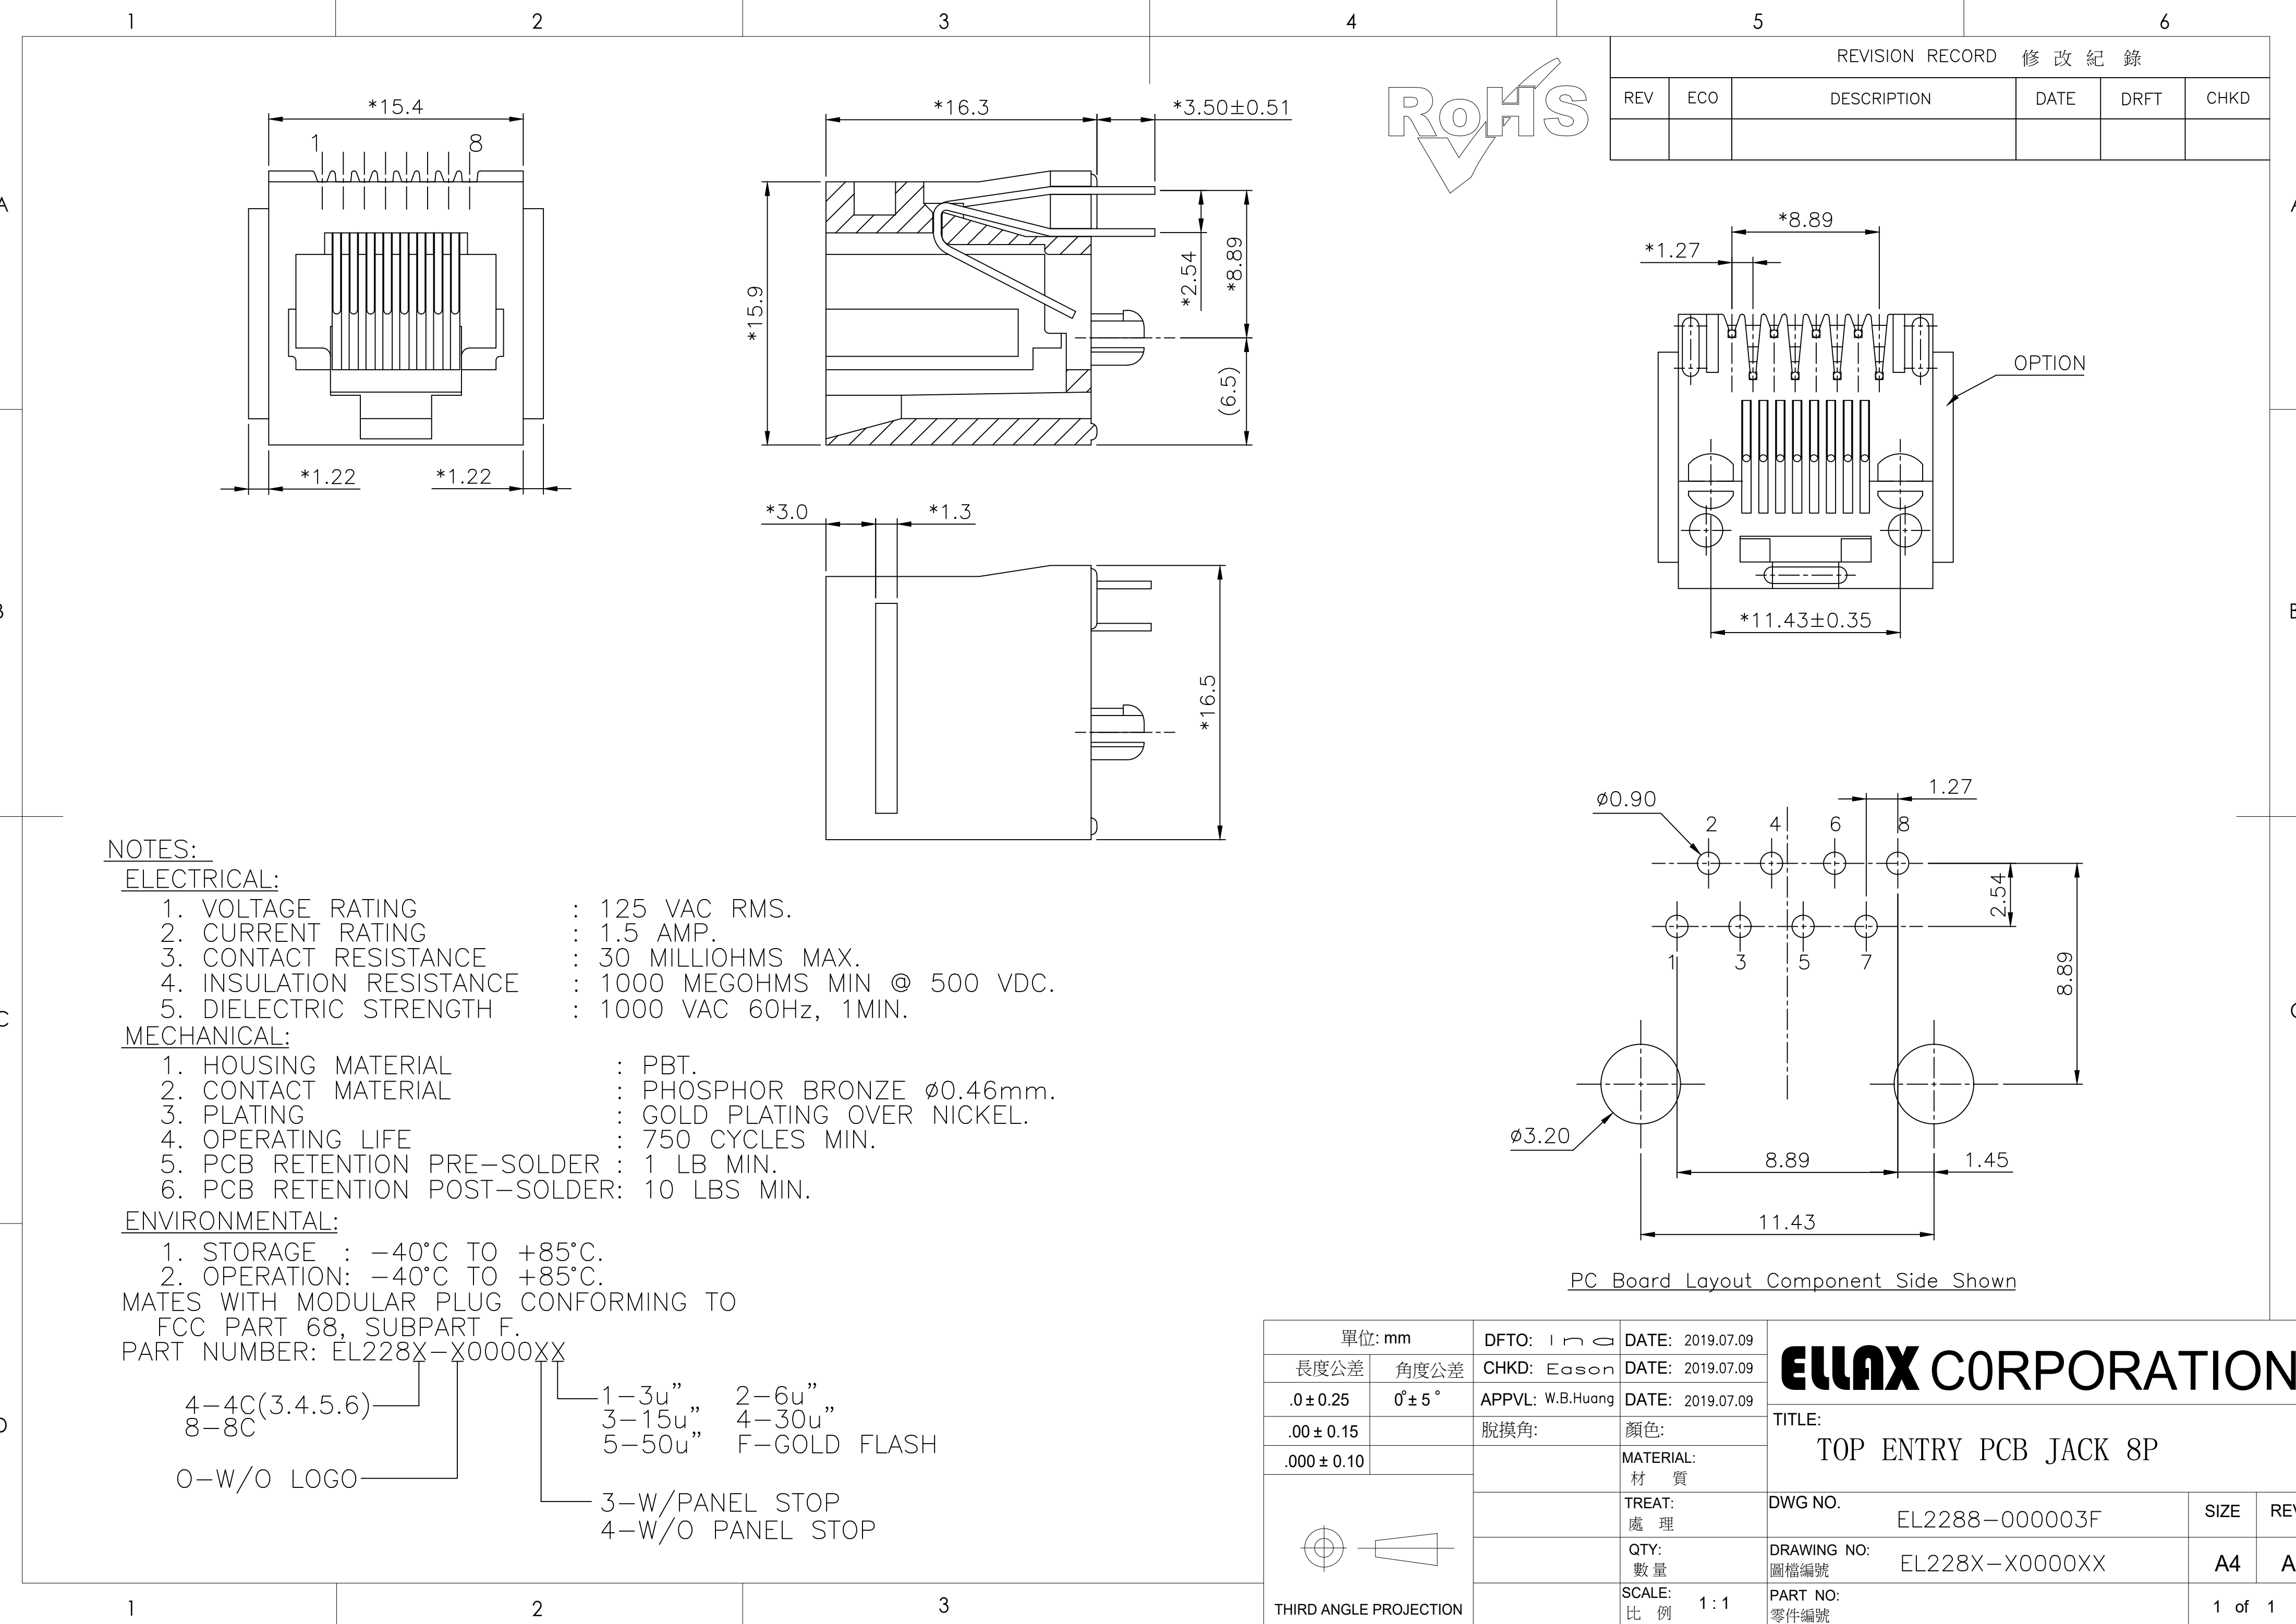

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : PBT.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- 3. PLATING : GOLD PLATING OVER NICKEL.
- 4. OPERATING LIFE : 750 CYCLES MIN.
- 5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- 6. PCB RETENTION POST-SOLDER: 10 LBS MIN.


ENVIRONMENTAL:

- 1. STORAGE : -40°C TO $+85^{\circ}\text{C}$.
- 2. OPERATION: -40°C TO $+85^{\circ}\text{C}$.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: EL228X-X0000XX

4-4C(3.4.5.6) 1-3u" 2-6u"
8-8C 3-15u" 4-30u"
5-50u" F-GOLD FLASH
O-W/O LOGO 3-W/PANEL STOP
4-W/O PANEL STOP

單位: mm		DFTO: ina	DATE: 2019.07.09
長度公差	角度公差	CHKD: Eason	DATE: 2019.07.09
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2019.07.09
.00±0.15		脫模角:	顏色:
.000±0.10			MATERIAL: 材 質
		TREAT: 處 理	DWG NO. EL2288-000003F
		QTY: 數 量	DRAWING NO: 圖檔編號 EL228X-X0000XX
		SCALE: 比 例 1:1	PART NO: 零件編號
THIRD ANGLE PROJECTION			1 of 1

ELIAX CORPORATION.

TITLE:
TOP ENTRY PCB JACK 8P

DWG NO.	EL2288-000003F	SIZE	REV
DRAWING NO: 圖檔編號	EL228X-X0000XX	A4	A
PART NO: 零件編號			