

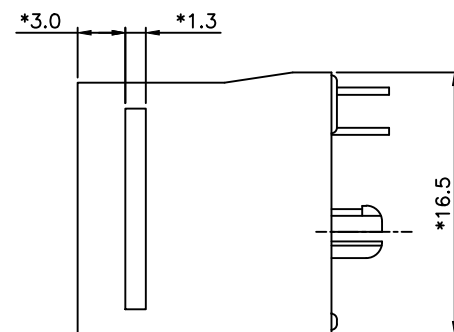
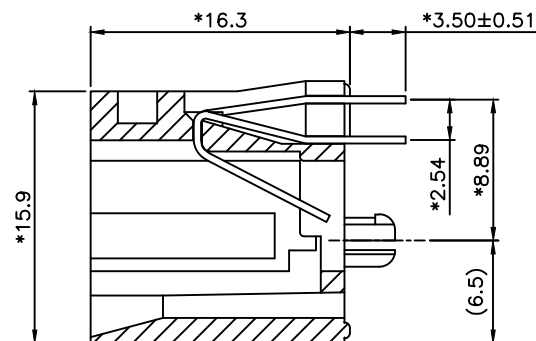
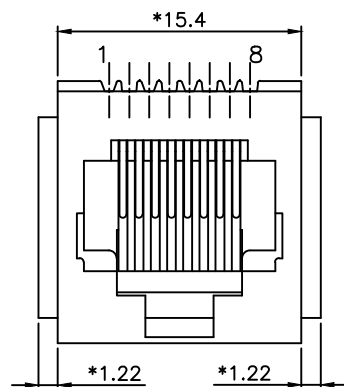


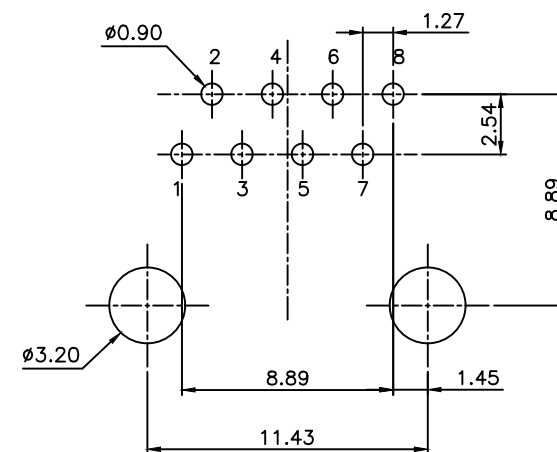

REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

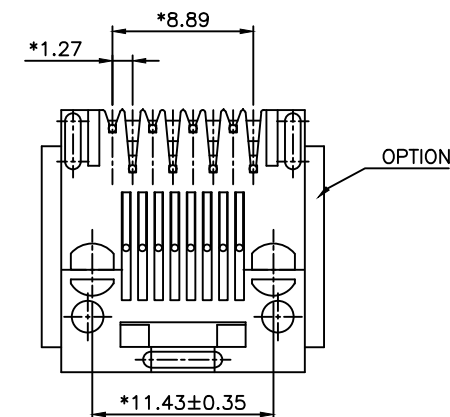

PC Board Layout Component Side Shown

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : PBT.
- CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO $+85^{\circ}\text{C}$.
- OPERATION: -40°C TO $+85^{\circ}\text{C}$.

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

PART NUMBER: EL228X-X0000XX

- 4-4C(3.4.5.6) 1-3u" 2-6u"
8-8C 3-15u" 4-30u"
5-50u" F-GOLD FLASH
- 0-W/O LOGO 3-W/PANEL STOP
4-W/O PANEL STOP

單位: mm		DFTO:	DATE: 2014.05.20	ELLAX CORPORATION.	
長度公差	角度公差	CHKD: Eason	DATE: 2014.05.20		
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2014.05.20	TITLE:	
.00±0.15		脫模角:	顏色:	TOP ENTRY PCB JACK 8P	
.000±0.10			MATERIAL:		
			TREAT:	DWG NO.	SIZE
			處理	EL2288-000004F	REV
			數量	DRAWING NO.	
			SCALE: 1:1	圖檔編號	A4
			比例	零件編號	A
				PART NO:	1 of 1