
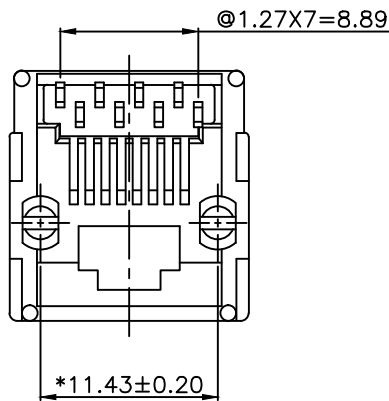
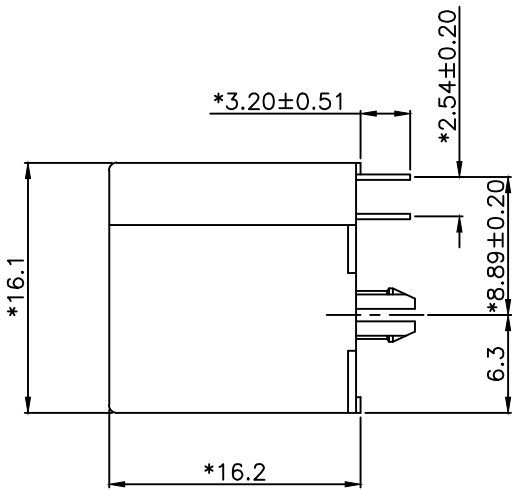


REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

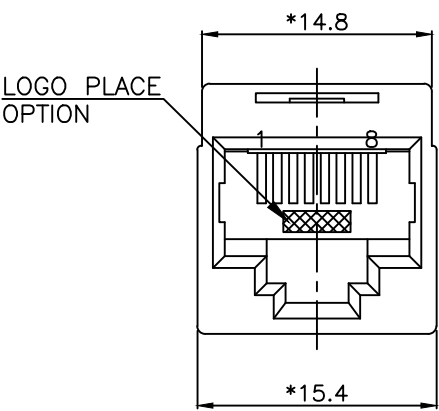

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT UL94V-0./COLOR:BLACK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
3. WAVE SOLDERING TEMPERRATURE: 230°C~240°C (3~5 SECONDS).
4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

CUL FILE NO. E345295

PART NUMBER: EL2288-031004X

0-W/O LOGO
1-1 PORT.
1-3u" 2-6u" 3-15u"
4-30u" 5-50u" F-GOLD FLASH

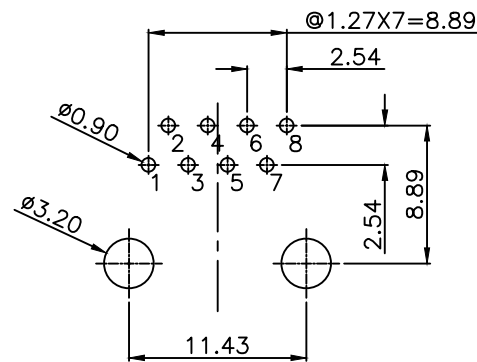

PC Board Layout Component Side Shown
PC Board Thickness=1.6mm
Tolerance±0.05

單位: mm	DFTO: 1111	DATE: 2017.08.07
長度公差	角度公差	CHKD: Eason
.0±0.25	0°±5°	DATE: 2017.08.07
.00±0.15		APPVL: W.B.Huang
.000±0.10		DATE: 2017.08.07
		顏色:
		脫模角:
		MATERIAL:
		材 質
		TREAT:
		處 理
		QTY:
		數 量
		SCALE:
		比 例
		2.5 : 1
		THIRD ANGLE PROJECTION

ELLAX CORPORATION.

TITLE:

RJ45 1X1 TOP ENTRY PCB JACK

DWG NO.	SIZE	REV
EL2288-0310045	A4	A
DRAWING NO:	PART NO:	1 of 1
圖檔編號	零件編號	
EL2288-0310045_A		