
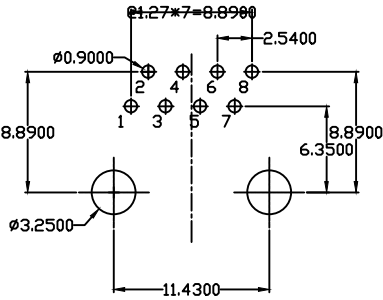
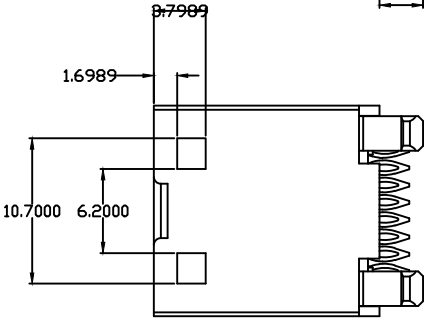

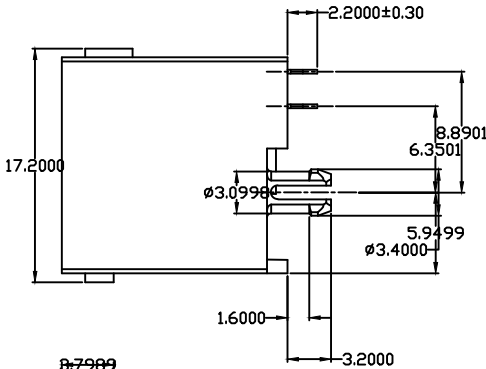



REVISION RECORD 修改紀錄					
REV	ECD	DESCRIPTION	DATE	DRFT	CHKD

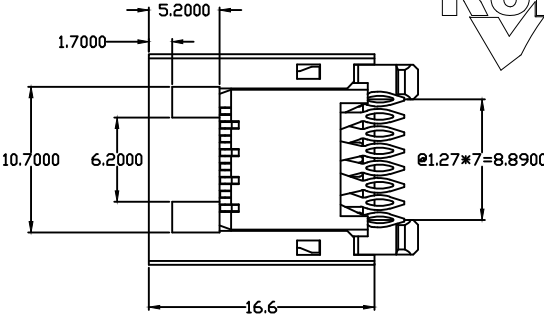

RECOMMENDED PCB LAYOUT
THICKNESS: 1.60MM
TOLERANCE: ±0.05MM

- NOTES:
- ELECTRICAL:**
- 1. VOLTAGE RATING : 125 VAC RMS.
 - 2. CURRENT RATING : 1.5 AMP.
 - 3. CONTACT RESISTANCE: 35 MILLIOHMS MAX.
 - 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
 - 5. DIELECTRIC STRENGTH: 1000 VDC RMS 60Hz, 1MIN.
- MECHANICAL:**
- 1. HOUSING MATERIAL : PBT UL94V-0/COLOR:BLACK.
 - 2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.30mm.
 - 3. PLATING : GOLD PLATING OF CONTACT AREA .
 - 4. OPERATING LIFE : 750 CYCLES MIN.
- ENVIRONMENTAL:**
- 1. STORAGE : -40°C TO +85°C.
 - 2. OPERATION: -40°C TO +85°C.
 - 3. RoHS COMPLIANT.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
PART NUMBER: EL2288-2AXXS1X

GOLD-PLATING
1-3u" 2-6u" 3-15u"
4-30u" 5-50u"

06-W/O LOGO,W/ PANEL STOP
14-W/O LOGO,W/O PANEL STOP

單位: mm		DFTO:	DATE: 2019.03.12
長度公差	角度公差	CHKD: Eason	DATE: 2019.03.12
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2019.03.12
.00±0.15		脫模角:	顏色:
.000±0.10			MATERIAL: 材 質
		TREAT: 處 理	DWG NO.
		QTY: 數 量	DRAWING NO:
		SCALE: 1:1 比 例	PART NO: 零件編號

ELLAX CORPORATION.

TITLE:
1x1 TOP ENTRY C6 JACK

DWG NO.	SIZE	REV
EL2288-2A14S12	A4	A
EL2288-2AXXS1X	1 of 1	