
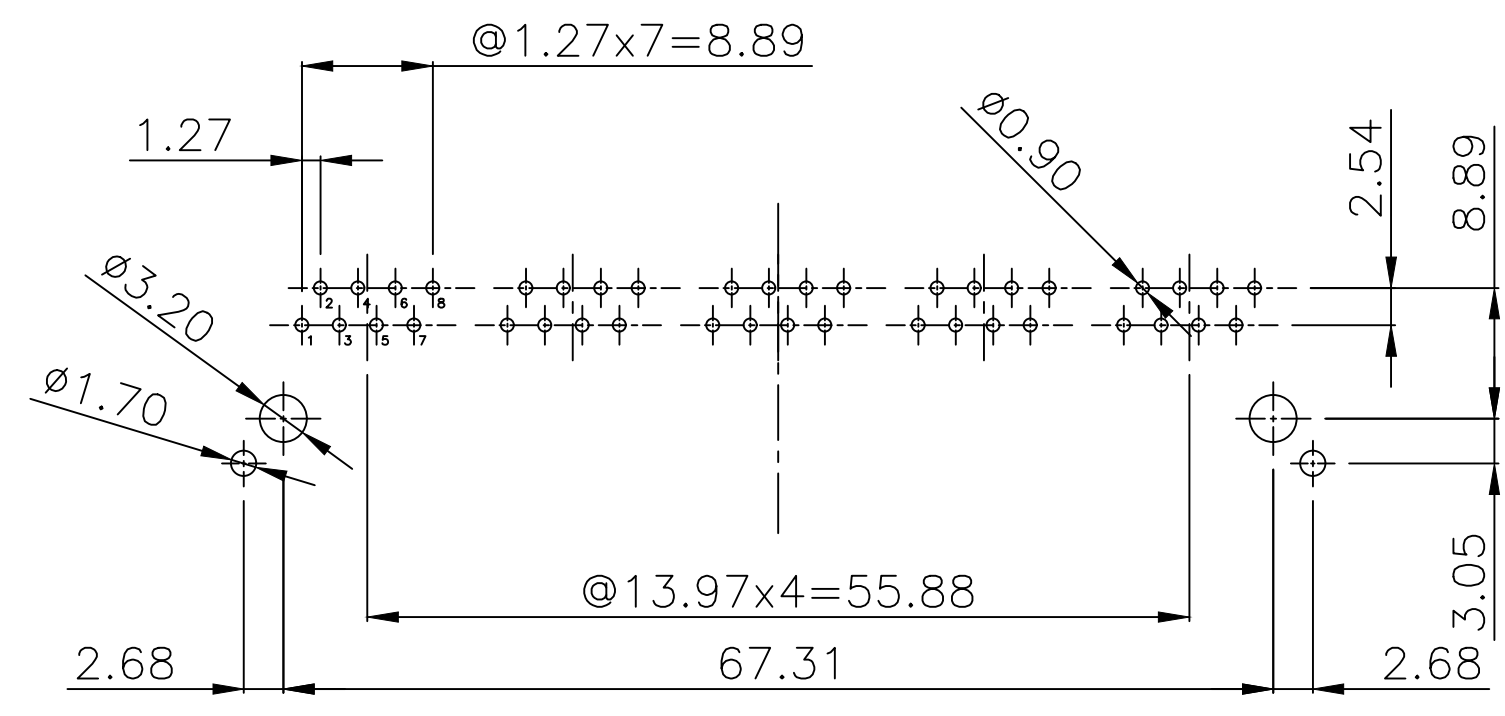
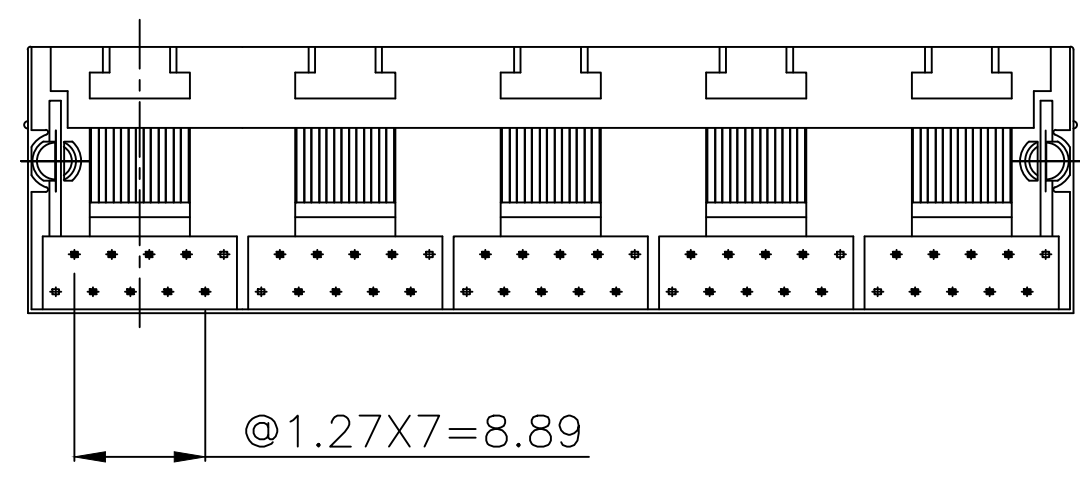
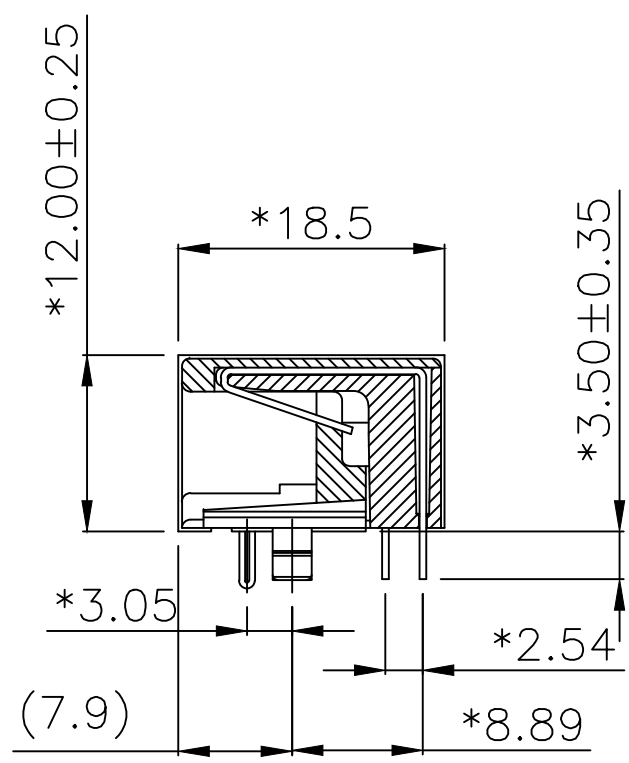


REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

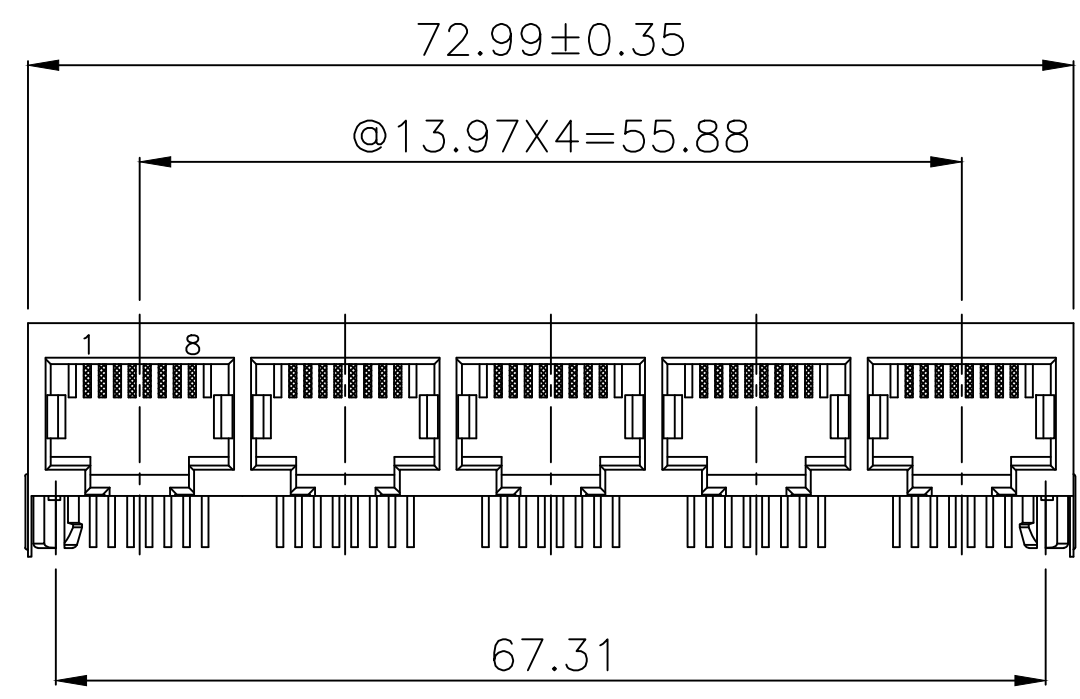

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP
- 3. CONTACT RESISTANCE : 45 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : NYLON UL94V-0./COLOR:BLACK
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- 3. PLATING : GOLD PLATING OVER NICKEL.
- 4. OPERATING LIFE : 750 CYCLES MIN.
- 5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- 6. PCB RETENTION POST-SOLDER: 10 LBS MIN.


ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
- 2. OPERATION: -40°C TO +85°C.
- 3. WAVE SOLDERING TEMPERATURE: 250~260°C(3~5 SECONDS).
- 4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

CUL FILE NO. E345295

RoHS PART NUMBER: EL260X-XXED38X

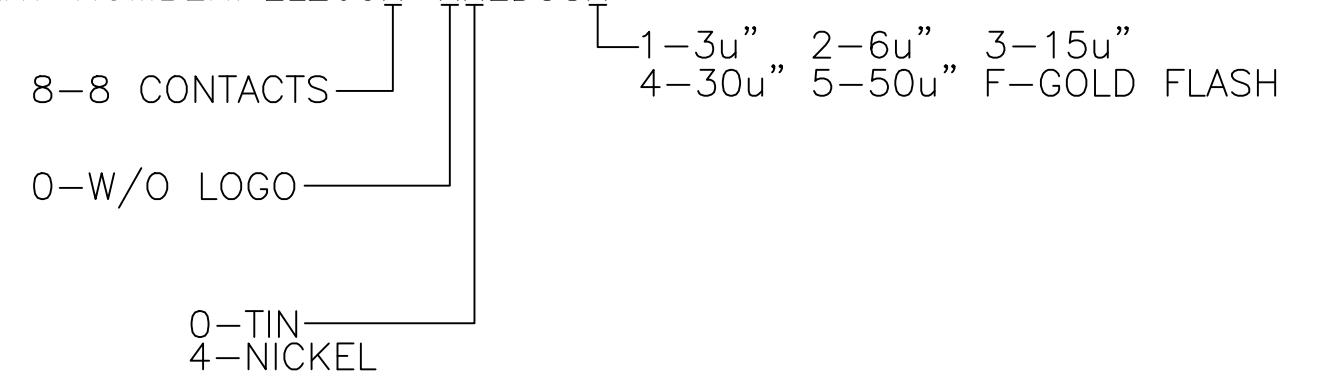

單位: mm		DFTO: Rose	DATE: 2019.08.02
長度公差	角度公差	CHKD: <img alt="checkmark symbol" style="vertical-align: middle;"/>	DATE: 2019.08.02
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2019.08.02
.00±0.15		脫模角:	顏色:
.000±0.10			MATERIAL: 材 質
 THIRD ANGLE PROJECTION		TREAT: 處 理	DWG NO. EL260X-04ED382
		QTY: 數 量	DRAWING NO: 圖檔編號 EL260X-XXED38X
		SCALE: 比 例 1:1	PART NO: 零件編號

**ELLAX CORPORATION**

TITLE: 11.5 Side Entry PCB JACK			
DWG NO.	EL260X-04ED382	SIZE	REV
DRAWING NO: 圖檔編號	EL260X-XXED38X	A4	A
PART NO: 零件編號		1 of 1	