

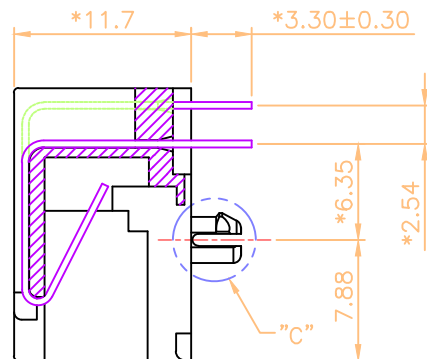
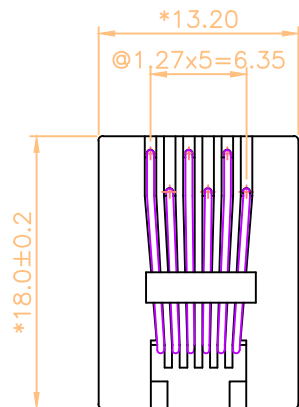




REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

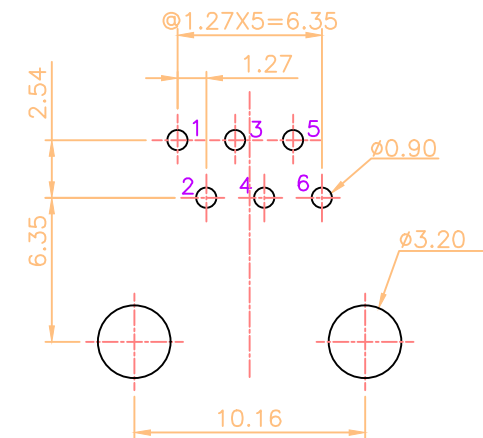

SECTION A-A

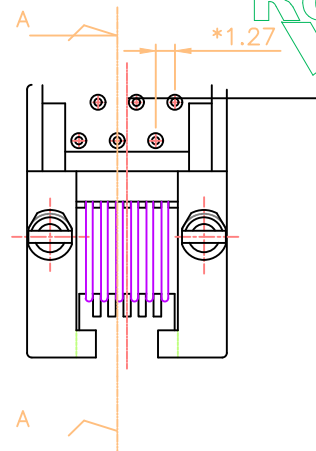

PC Board Layout Component Side Shown
PC Board Thickness=1.6mm
Tolerance±0.05

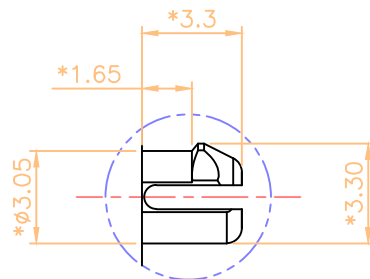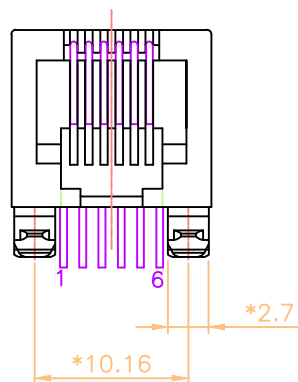

DETAIL "C"

SCALE 2:1

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 45 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 1000 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : PBT UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46$ mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 230~240°C(3~5 SECONDS).
- RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E345295

PART NUMBER: EL266X-31XXS1X

2-2C 1-3u" 2-6u" 3-15u"
4-4C 4-30u" 5-50u" F-GOLD FLASH
6-6C
17-W/O LOGO, PBT COOL GRAY 3U
20-W/O LOGO, PBT BLACK

單位: mm		DFTO:	DATE: 2016.10.10	ELLAX CORPORATION.		
長度公差	角度公差	CHKD: Jerry	DATE: 2016.10.10			
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2016.10.10			
.00±0.15		脫模角:	顏色:			
.000±0.10			MATERIAL:	TITLE: 90° VERY L/P PCB JACK 6P		
			材 質			
			TREAT:			
			處 理			
THIRD ANGLE PROJECTION			QTY:	DWG NO.	EL2664-3120S1F	SIZE
			數量	DRAWING NO:	EL266X-31XXS1X_A	REV
			SCALE: 1:1	圖檔編號		A4
			比例	PART NO:		A
				零件編號		1 of 1