


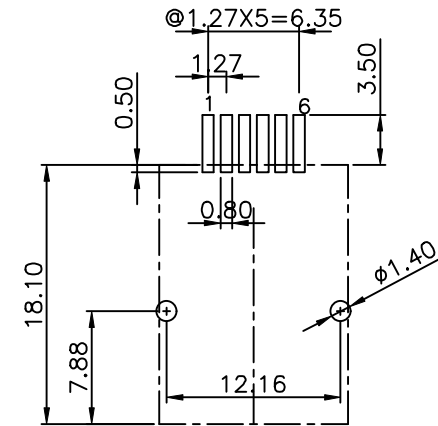
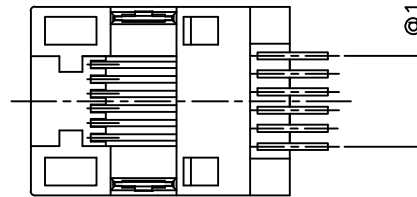


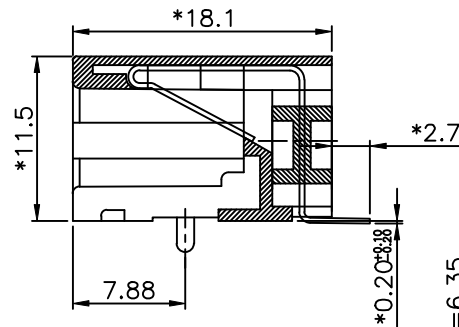

REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD



PC Board Layout Component Side Shown
PC Board Thickness=1.6mm
Tolerance±0.05



180 PCS/REEL,1800 PCS/CARTON

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : NYLON UL94V-0. COLOR:BLACK
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION POST-SOLDER: 10 LBS MIN.


ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
3. IR REFLOW PEAK SOLDERING TEMPERATURE: 255°C TO 265°C 5~10 SECONDS.
4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

PART NUMBER: EL266X-3SXXS1X

6-6C
1-3u" 2-6u"
3-15u" 4-30u"
5-50u" F-GOLD FLASH
01-W/O LOGO, NYLON BLACK

單位: mm		DFTO: I n d	DATE: 2018.08.14	ELLAX CORPORATION		
長度公差	角度公差	CHKD: Eason	DATE: 2018.08.14			
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2018.08.14			
.00±0.15	脫模角:	顏色:	TITLE:			
.000±0.10		MATERIAL: 材 質	SIDE ENTRY PCB JACK(SMT) 6P			
		TREAT: 處 理	DWG NO.	EL2666-3S01S12	SIZE	REV
		QTY: 數 量	DRAWING NO: 圖檔編號	EL2666-3S01S12	A4	A
		SCALE: 比 例 1:1	PART NO: 零件編號	1 of 1		
		THIRD ANGLE PROJECTION				