
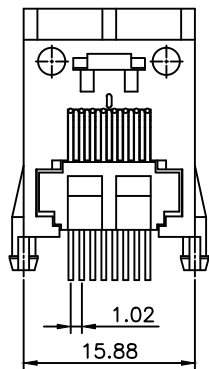
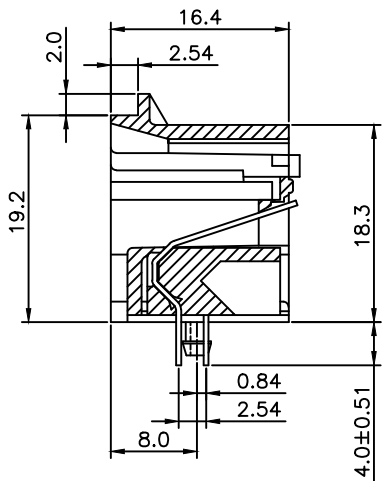


REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

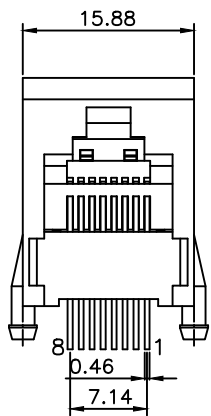

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT UL94V-0. COLOR:BK
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.
3. WAVE SOLDERING TEMPERATURE: 230°C~240°C(3~5 SECONDS).

MATES WITH MODULAR PLUG CONFORMING TO


FCC PART 68, SUBPART F.

CUL FILE NO. E345295

ROHS PART NUMBER: EL2688-4101S1X

1- 3u" 2- 6u"
3-15u" 4-30u"
5-50u" F-GOLD FLASH

01- W/O LOGO, PBT BLACK

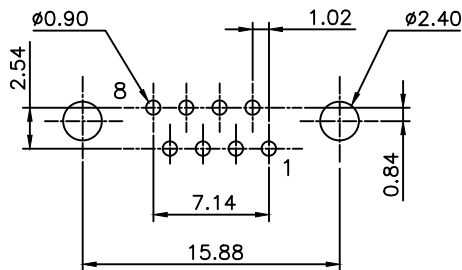

PC Board Layout
Component Side Shown

單位: mm		DFTO:	DATE: 2017.08.07
長度公差	角度公差	CHKD: Eason	DATE: 2017.08.07
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2017.08.07
.00±0.15		脫模角:	顏色:
.000±0.10			MATERIAL:
			材 質
			TREAT:
			處 理
			QTY:
			數 量
			SCALE:
			比 例 2.5 : 1

ELLAX CORPORATION.

TITLE:

RJ45 1X1 FOR PCB JACK

DWG NO.	SIZE	REV
EL2688-4101S15	A4	A
DRAWING NO:	1 of 1	
圖檔編號		
PART NO:		
零件編號		