

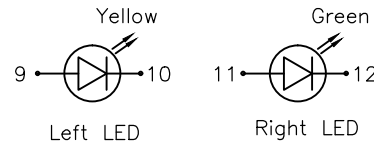
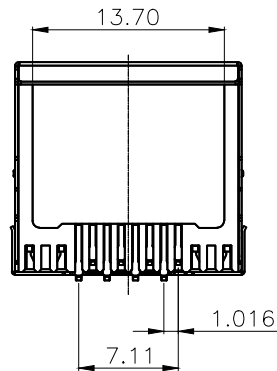

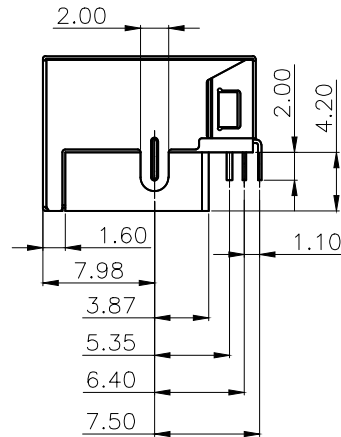
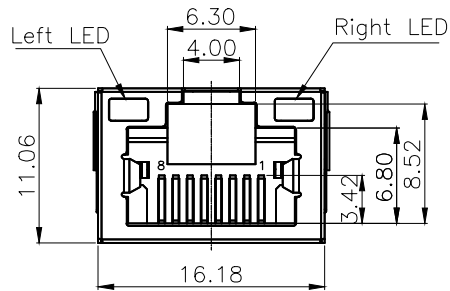



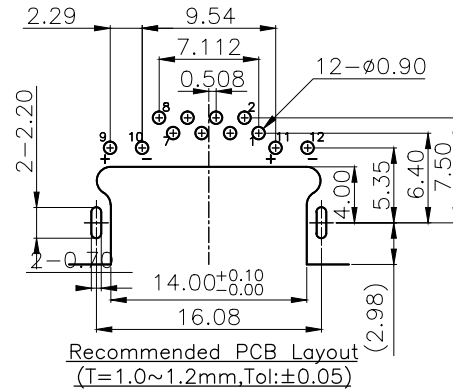

REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

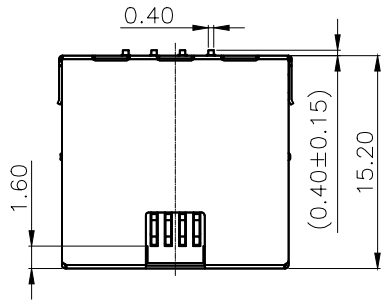

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 45 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : LCP UL94V-0./COLOR:BLACK
2. CONTACT MATERIAL : PHOSPHOR BRONZE 0.25mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER: 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
 2. OPERATION: -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
PART NUMBER: EL2690-3CYGS1X

1-3u" 2-6u"
3-15u" 4-30u"
5-50u" F-GOLD FLASH
D-1.5u"
YG-WITH LED,LEFT YELLOW,
WITH LED,RIGHT GREEN.

單位: mm		DFTO: in a	DATE: 2017.11.02	ELLAX CORPORATION.		
長度公差	角度公差	CHKD: Allen	DATE: 2017.11.02			
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2017.11.02	TITLE: RJ45 RA TH SINK 4.2mm SHIELDED WITH LED		
.00±0.15		脫模角:	顏色:			
.000±0.10			MATERIAL: 材 質			
			TREAT: 處 理	DWG NO.	EL2690-3CYGS1F	SIZE REV
			QTY: 數 量	DRAWING NO: 圖檔編號	EL2690-3CYGS1F_A	A4 A
			SCALE: 比 例	PART NO: 零件編號		1 of 1