
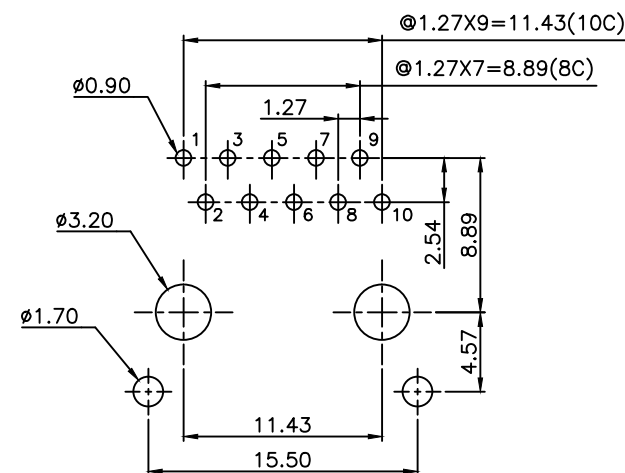
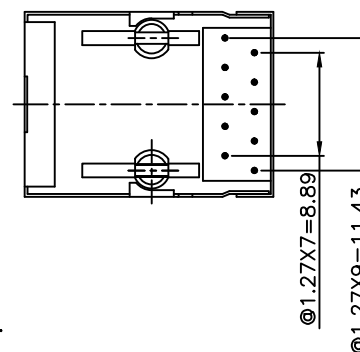



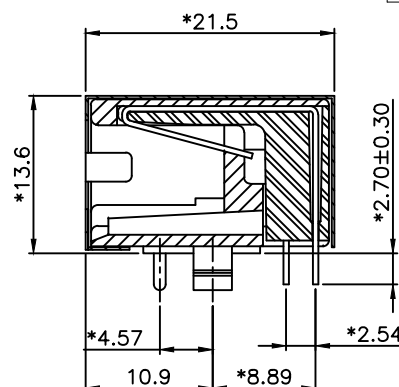

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 45 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

- | | |
|------------------------------|----------------------------------|
| 1. HOUSING MATERIAL | : NYLON UL94V-0. /COLOR:BLACK. |
| 2. CONTACT MATERIAL | : PHOSPHOR BRONZE ϕ 0.46mm. |
| 3. PLATING | : GOLD PLATING OVER NICKEL. |
| 4. OPERATING LIFE | : 750 CYCLES MIN. |
| 5. PCB RETENTION PRE-SOLDER | : 1 LB MIN. |
| 6. PCB RETENTION POST-SOLDER | : 10 LBS MIN. |

ENVIRONMENTAL:

1. STORAGE : -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION: -40°C TO $+85^{\circ}\text{C}$.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

PART NUMBER: EL290X-X1XX1QX


8-8 CONTACTS—
1-10 CONTACTS

0-W/O LOGO _____
1-W/ ZSNOW LOGO _____
2-W/ "F" LOGO _____

1-3u" 2-6u" 3-15u"
4-30u" 5-50u" F-GOLD FLASH

—0-PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
1-PHOSPHOR BRONZE $\phi 0.35\text{mm}$ THICKNESS.

—3—TIN
5—NICKEL



THIRD ANGLE PROJECTION

DFTO: Ing	DATE: 2017.08.07
CHKD: Allen	DATE: 2017.08.07
APPVL: W.B.Huang	DATE: 2017.08.07
脫模角:	顏色:
	MATERIAL: 材 質
	TREAT: 處 理
	QTY: 數 量
	SCALE: 比 例 2.5 : 1

ELLAX CORPORATION.

7	
	TITLE:

RJ45 1X1 20.57 Side Entry W/O LED

	DWG NO.
--	---------

FI 2908-01501QF

	DRAWING NO:
--	-------------

EL2908-01501QF_A

PART NO:

SIZE

REV

1 of 1