

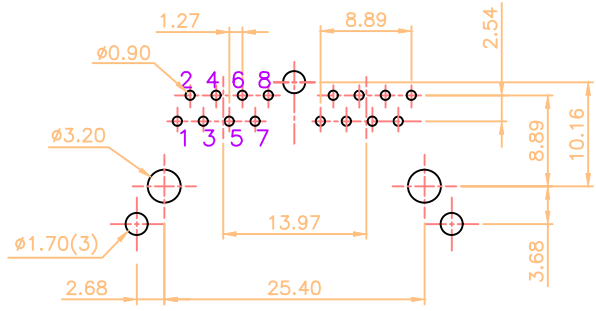


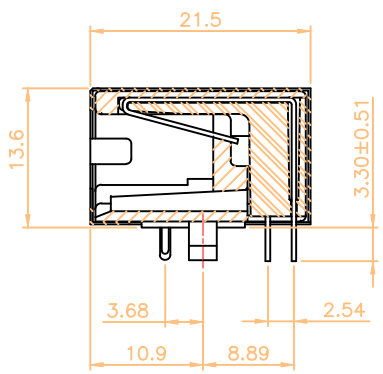


REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

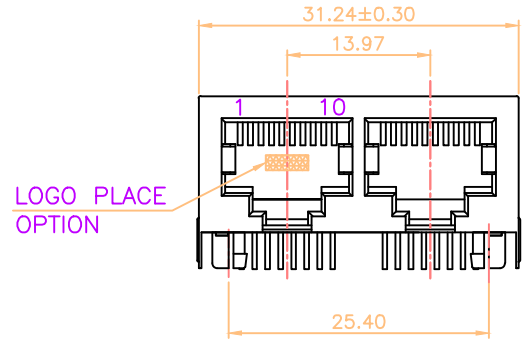

PC Board Layout Component Side Shown
PC Board Thickness=1.6mm PCB TOLERANCE:±0.05

- NOTES:
- ELECTRICAL:
- 1. VOLTAGE RATING : 125 VAC RMS.
 - 2. CURRENT RATING : 1.5 AMP.
 - 3. CONTACT RESISTANCE : 45 MILLIOHMS MAX.
 - 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
 - 5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.
- MECHANICAL:
- 1. HOUSING MATERIAL : PBT UL94V-0. /COLOR:BLACK.
 - 2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
 - 3. PLATING : GOLD PLATING OVER NICKEL.
 - 4. OPERATING LIFE : 750 CYCLES MIN.
 - 5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
 - 6. PCB RETENTION POST-SOLDER: 10 LBS MIN.
- ENVIRONMENTAL:
- 1. STORAGE : -40°C TO +85°C.
 - 2. OPERATION: -40°C TO +85°C.
 - 3. WAVE SOLDERING TEMPERATURE: 230~240°C(3~5 SECONDS).
 - 4. RoHS COMPLIANT.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E345295
TOP-LEVEL-ASSEMBLY APPEARANCE QUALITY AND OTHERS ACCORDING
TO QAIP-008 IF NOTHING ELSE IS SPECIFIED.
DIMENSIONS WITH "QC" MARK HAVE TO BE MEASURED IN IPQC INSPECTION.
PART NUMBER: EL290X-XXXAXXX

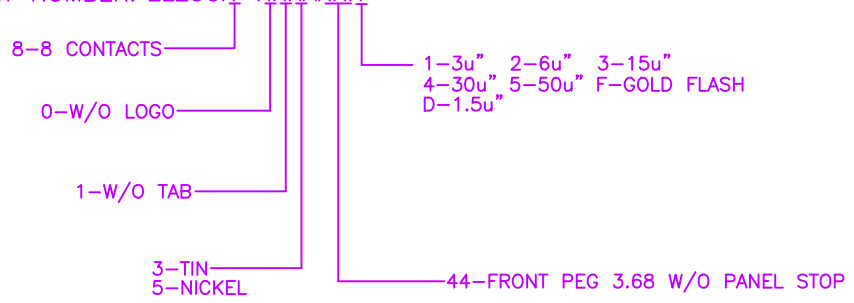

單位: mm		DFTO:	DATE: 2018.01.03	ELLAX CORPORATION. TITLE: 20. 57 SIDE ENTRY PCB JACK		
長度公差	角度公差	CHKD: Jerry	DATE: 2018.01.03			
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2018.01.03			
.00±0.15		脫模角:	顏色:			
.000±0.10				MATERIAL: 材 質	DWG NO.	EL2908-015A443
				TREAT: 處 理	SIZE	REV
				QTY: 數 量	DRAWING NO: 圖檔編號	A4
				SCALE: 比 例	PART NO: 零件編號	A
THIRD ANGLE PROJECTION			1:1			1 of 1