
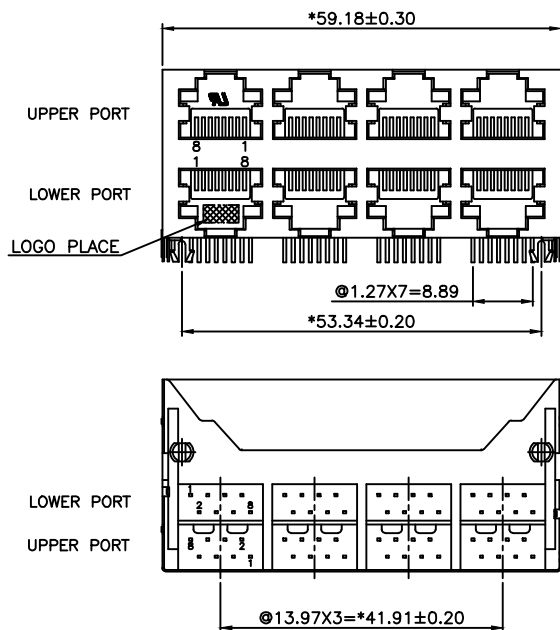




NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 60 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : NYLON UL94V-0./COLOR:BLACK.
2. SHIELD MATERIAL : BRASS.
3. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
4. PLATING : GOLD PLATING OVER NICKEL.
5. OPERATING LIFE : 750 CYCLES MIN.
6. PCB RETENTION PRE-SOLDER : 1 LB MIN.
7. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:



1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE: 250~260°C(3~5 SECONDS).
4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

CUL FILE NO. E345295

PART NUMBER: EL2908-017C15X

Gold Thickness:
1-3u" 2-6u" 3-15u"
4-30u" 5-50u" F-Gold Flash
0-W/O LOGO

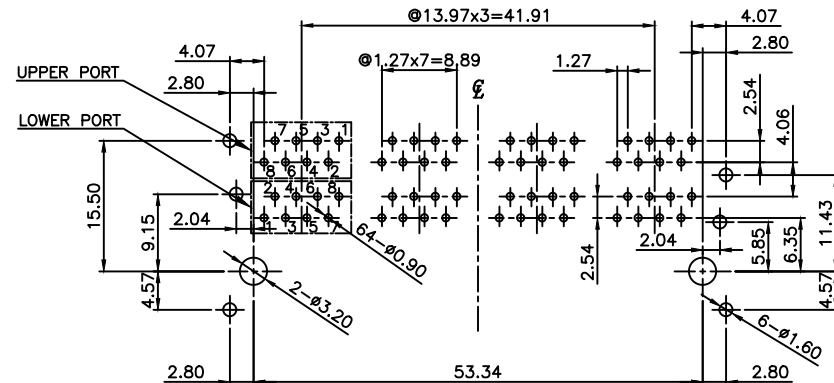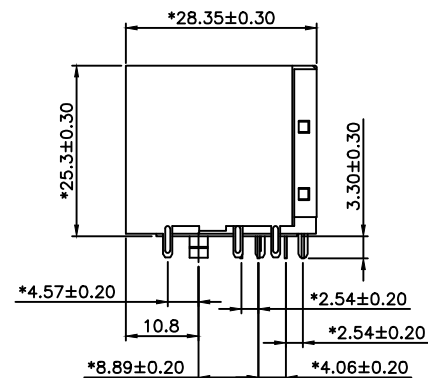

PC Board Layout Component Side Shown

PC Board Thickness=1.6mm

Tolerance±0.05

單位: mm	DFTO:	DATE: 2017.08.17
長度公差	角度公差	CHKD: Allen
.0±0.25	0°±5°	DATE: 2017.08.17
.00±0.15	脫模角:	APPVL: W.B.Huang
.000±0.10		DATE: 2017.08.17
		顏色:
		MATERIAL:
		材 質
		TREAT:
		處 理
		QTY:
		數量
		SCALE:
		比 例 2.5 : 1
THIRD ANGLE PROJECTION		

REVISION RECORD 修改紀錄

REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

ELLAX CORPORATION.

TITLE:

RJ45 2x4 STACKED GANGED JACK

DWG NO.	EL2908-017C152	SIZE	REV
DRAWING NO.	EL2908-017C152_A	A4	A
PART NO.			
零件編號			