


REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

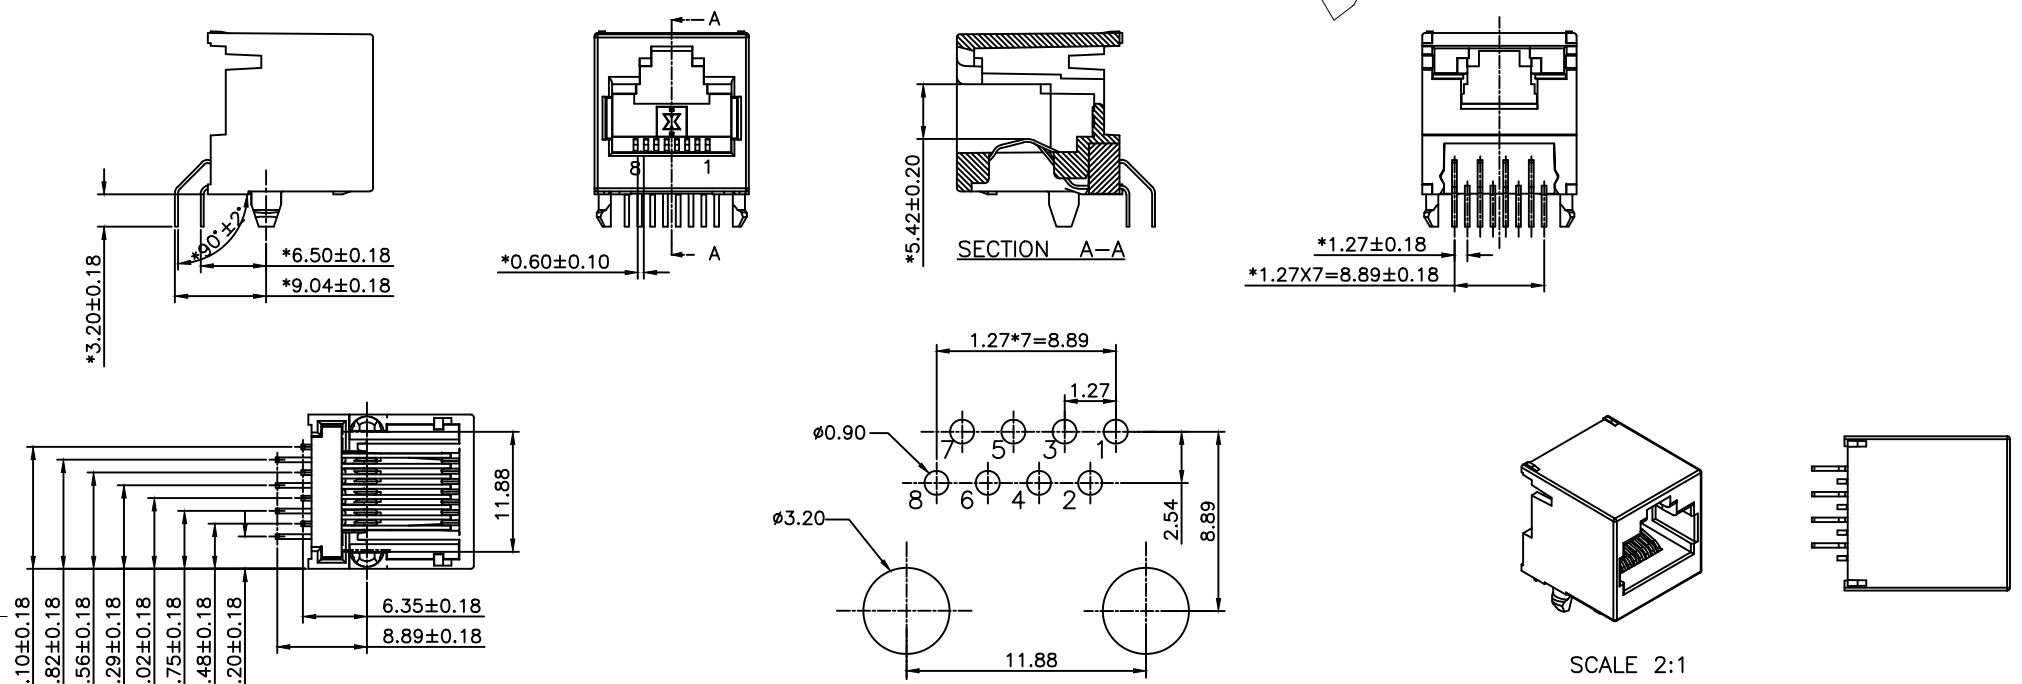

4. CATEGORY C6A CHARACTERISTIC:

Frequency	Near-End Cross Talk dB, MIN.	Return Loss dB, MIN.	Attenuation dB, MAX.
1.0 MHZ	75.0	30	0.1
4.0 MHZ	75.0	30	0.1
8.0 MHZ	75.0	30	0.1
10.0 MHZ	74.0	30	0.1
16.0 MHZ	69.9	30	0.1
20.0 MHZ	68.0	30	0.1
25.0 MHZ	66.0	30	0.1
31.25 MHZ	64.1	30	0.11
62.5 MHZ	58.1	30	0.16
100.0 MHZ	54.0	28	0.20
200.0 MHZ	48.0	22	0.28
250.0 MHZ	46.0	20	0.32
300.0 MHZ	42.9	18.5	0.35
400.0 MHZ	37.9	16.0	0.40
500.0 MHZ	34.0	14.0	0.45

- NOTE:
- ELECTRIC:
1. VOLTAGE RATING : 125VAC RMS.
 2. CURRENT RATING: 1.5 AMP.
 3. DIELECTRIC STRENGTH: 1000VDC 60HZ 1MIN.
- MECHANICAL:
1. HOUSING MATERIAL: PBT UL94V-0; COLOR: BLACK.
 2. CONTACT MATERIAL: PHOSPHOR BRONZE C5210EH T=0.30mm.
 3. INSERT MATERIAL: PBT UL94V-0; COLOR: BLACK.
 4. RoHS COMPLIANT
 5. PART NUMBER: EL2988-EA03S1X
- 2-6u" 3-15u"
4-30u" 5-50u"

單位: mm		DFTO: 	DATE: 2019.03.26	ELLAX CORPORATION. TITLE: RJ45 C6A UTP JACK		
長度公差	角度公差	CHKD: Eason	DATE: 2019.03.26			
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2019.03.26			
.00±0.15		脫模角:	顏色:			
.000±0.10			MATERIAL: 材 質	DWG NO. EL2988-EA03S1X SIZE REV DRAWING NO: EL2988-EA03S1X__A A4 A PART NO: 零件編號		