
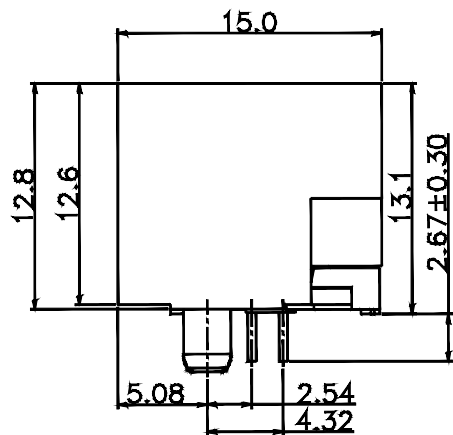
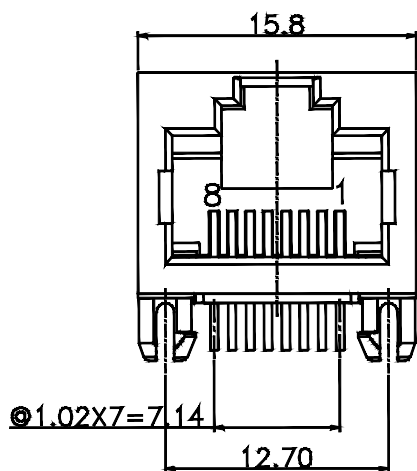


REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

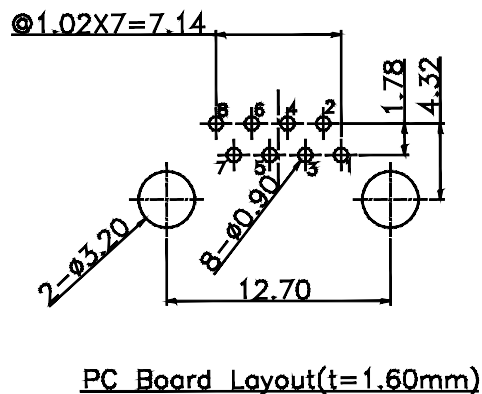

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.
6. OPERATING: 750 CYCLES MIN.

MECHANICAL:

1. HOUSING MATERIAL : LCP UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE 0.46mm
3. PLATING : GOLD PLATING OVER NICKEL.
4. PCB RETENTION PRE-SOLDER: 1 LB MIN.
5. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE: 250°C~260°C(3~5 SECONDS).
4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO.E345295

PART NUMBER: EL2J8X-J1XXS1X

D-4C(1,2,3,6 PIN)
8-8C

1-3u" 2-6u"
3-15u" 4-30u"
5-50u" F-GOLD FLASH

53-W/O LOGO,LCP BLACK

單位: mm		DFTO:	DATE: 2019.01.18
長度公差	角度公差	CHKD: Eason	DATE: 2019.01.18
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2019.01.18
.00±0.15		脫模角:	顏色:
.000±0.10			MATERIAL:
		TREAT:	DWG NO.
		處理	EL2J88-J153S1F
		QTY:	DRAWING NO:
		數量	EL2J8X-J1XXS1X_A
THIRD ANGLE PROJECTION		SCALE: 1:1	PART NO:
		比例	零件編號

ELLAX CORPORATION.

TITLE:
3046 Housing LCP Jack

SIZE	REV
A4	A
1 of 1	